




TOUCH
FINGERPRINTING

2D STATION


Berührungsbasierte Biometriestation in Kombination mit RFID für hohe Sicherheit und Anwenderfreundlichkeit am Zutrittspunkt.

- Optischer Touch-Sensor, FBI-zertifiziert
- Hohe Erkennungsleistung
- Zutritt und Zeiterfassung
- Indoor- und Outdooreinsatz
- Auf- oder Unterputzmontage
- UP-Montage in Doppelelektrodose
- Identifikation oder RFID-Verifikation
- Kleine bis mittelgrosse Nutzergruppen
- Benutzerführung über Leuchtring
- Autonom und netzwerkfähig
- Vandalismusoptimiert

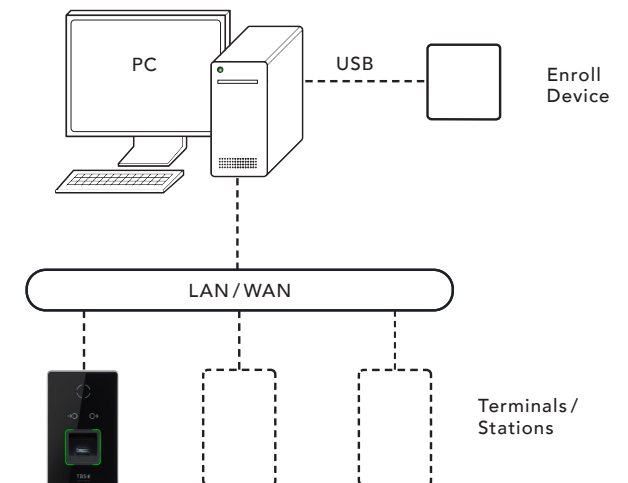




2D STATION




100 mm

Flush mount



60 mm 11 mm

Wall mount



75 mm

160 mm

Touchless Biometric Systems AG
 Rietbrunnen 2
 8808 Pfäffikon SZ
 Switzerland
 tbs@tbs-biometrics.com
 www.tbs-biometrics.com

		3D TERMINAL	2D EYE	2D+ TERMINAL	2D TERMINAL HEAVY/DUTY	2D TERMINAL	2D STATION	2D MINI	2D MINI/HOME
Applications	Access Control	•	•	•	•	•	•	•	•
	Time & Attendance	•	•	•	•	•	in/out	in/out	
	Civil / Criminal								
Sensor	Touchless, 3D-Multiview	•							
	2D-Camera		•						
	Optical Touch, FBI-certified					•	•		
	Capacitive Touch							•	•
	Multispectral			•	•				
User Interface	7.0" Touchscreen								
	5.0" Touchscreen	•	•	•	•				
	3.5" Touchscreen					•			
	RFID	(•)	•	(•)	(•)	(•)	•		
	PIN	•	•	•	•	•			
	Loudspeaker	•	•	•	•				
	Beeper					•	•	•	•
Biometrics	Identifications (1:N)	•	•	•	•	•	•	•	•
	Verification (1:1)	•	•	•	•	•	•	•	•
	1:N Database Size Limit	10'000 ¹	10'000	10'000 ¹	10'000 ¹	5'000	5'000	5'000	5'000
	1:1 Database Size Limit	100'000	100'000	100'000	100'000	100'000	100'000	100'000	100'000
	FRR at FAR 1:100'000	<0.5%	<0.5%	<1.0%	<1.0%	<2.0%	<2.0%	<2.0%	<2.0%
	Standalone Capability	•	•	•	•	• ⁵	• ⁵	• ⁵	• ⁵
	Communication	LAN	•	•	•	•	•	•	•
	WLAN	(•)	(•)	(•)	(•)	(•) ²	(•) ²	(•) ²	
Interfaces	RS 232 / RS 485 (OSDP)	•	•	•	•	•	•	•	
	Wiegand	•	•	•	•	•	•	•	
	Relay Output	(2) ⁶	1	2	2	(1) ⁷	(1) ⁷	(1) ⁷	(1) ⁷
	I/O	(1/1)	2/-	2/2	2/2				
Security	Liveness Detection	(•)	(•)	(•)	(•)				
	Multi-level Data Encryption	•	•	•	•	•	•	•	
	Template on Card	(•)	(•)	(•)	(•)	(•)	(•)		
	Anti-tampering / Silent Alarm	(•)	(•)	(•)	(•)	(•)	(•)	(•)	(•)
Conditions	Input Supply Voltage DC	9-30V	12V	9-30V	9-30V	9-30V	9-30V	9-30V	9-30V
	Max. Power Rating	25W	36W	15W	15W	15W	10W	10W	10W
	Operation Temperature in C	-20-60	0-45	-20-60	-20-60	-20-60	-20-60	-20-60	-20-60
	Humidity 10-90%	•	•	•	•	•	•	•	•
Mounting	Wall mount ⁽³⁾	•	•	•	•	•	•		
	Flush mount / Outdoor ⁽³⁾	•		•		•	•	•	
	Outdoor kit ⁽³⁾	(•) ⁴				(•) ⁴	(•) ⁴	(•) ⁴	(•) ⁴
Certifications	CE	•	•	•	•	•	•	•	